




## DESIGN FEATURES

- Successfully tested to comply with Australian standard AS 2047
- Adjustable louvre window system is designed to compliment our full range of cedar products and can be coupled to all of the cedar range vertically and some horizontally.
- Louvre blades are fitted using Breezway mechanisms, which provide excellent water resistance and a tight seal to reduce draughts.
- The wide cedar frame allows a flyscreen to be fitted within the frame line.
- Standard blade heights are 102mm and 152mm. When choosing a frame height allow for full height blades to give the best appearance
- Louvre windows are a good energy efficient solution to bringing natural light, fresh air and a sense of space into your building design.
- Louvre mechanisms can be key locked and colour matched.
- Fixed sill has a tapered design to assist drainage. 168mm sill available.

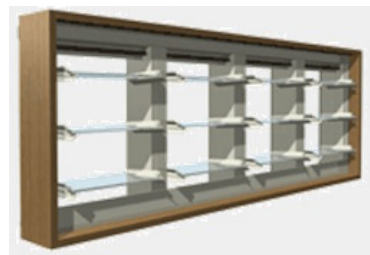

700/150Pa Wind/Water Rating

Maximum Overall Height	3068mm - 21 full blades
Maximum Overall Width	1028mm - Single light
Maximum Glass Width	6mm

*Subject to individual site conditions. Contact HANLON WINDOWS Technical Support for more information.*



AWA / WERS RATED PRODUCT



PRODUCT INFORMATION AVAILABLE AT  
[WWW.HANLONWINDOWS.COM.AU](http://WWW.HANLONWINDOWS.COM.AU)



SPECIFIER ASSISTANCE AVAILABLE

## TYPICAL CONFIGURATIONS

