

## World-leading skylights and roof windows

Product information and price list

April 2024



HOME OFFICE  
SOLUTION



SOLAR-POWERED  
SKYLIGHTS



STREAMLINED  
EXTERIOR



**CODEMARK®**  
Australia

30089/30090/30091

CodeMark  
CERTIFIED



HAIL  
TESTED



BUSHFIRE  
BAL40



FCM  
NT Deemed to Comply

CYCLONE  
TESTED



20+ Videos  
VELUX Australia

Throughout the construction industry, VELUX is a by-word for quality, a reputation that has been painstakingly built up for more than 35 years in Australia and for over 80 years around the world.

Perfectly designed to withstand the world's harshest climatic conditions, all VELUX products are of the highest quality and will perform superbly for a lifetime of faultless service.



Take a look through this guide and judge for yourself. For range, quality, value, guarantees, delivery and service – VELUX is a world leader.

## Guaranteed to last...

**10 Year Warranty**  
on all skylights, roof windows and flashings.

**3 Year Warranty**  
on accessories, including electric controls & blinds.



CodeMark® is a voluntary certification scheme owned by the Commonwealth of Australia that provides legally binding evidence of compliance to the National Construction Code of Australia. One certificate replaces dozens of technical papers.

### Surpasses Australian tests for skylights

<b>AS4285 SKYLIGHTS</b>  Cyclonic† & Non-Cyclonic	<b>AS1288 OVERHEAD GLAZING</b>  Laminated inner pane	<b>AS3959 BUSHFIRE*</b>  Attack Level 40
---	--	--

### Window Energy Rating Scheme (WERS)

(MAXIMUM 5 ON WERS SUMMER RATING)



VELUX Skylights and Roof Windows are included in the National Energy Rating programme (AccuRate) as well as state run programmes such as Basix & FirstRate.

#### Australian Building Code


All VELUX Skylights/Roof Windows (except Sun Tunnels) are assessed as non-combustible and are suitable for installations close to boundary separations\*.

- \* CSIRO assessment report available on request. VELUX recommends consultation with relevant authority for possible Performance Solution before work commences. Opening models assessed in closed position.
- ^ Skylight product range only. Custom-made flashing required. Tested in closed position, fire resistant mesh may be required for opening models. Rigid Sun Tunnel BAL29. Please consult your local council.
- † Except GPL Roof Window and Sun Tunnel. VCS/VCM cyclone test not performed with screws provided, installation requires the use of #8 roofing screws.

## Glazing

### High Performance Double Glazing

Standard across entire skylight range

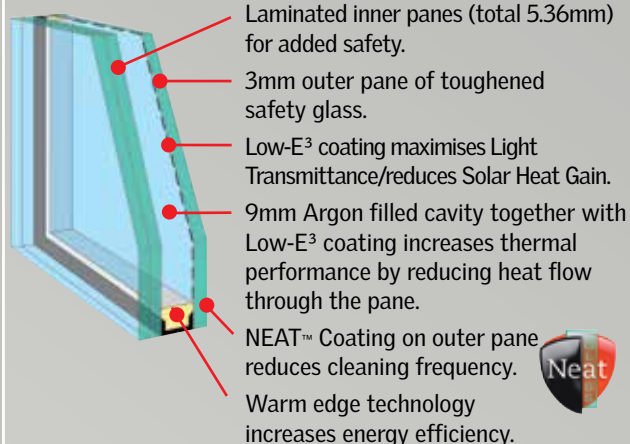

#### Benefits:

- Radiant heat block: Complete window **approx 75%**
- UV Harmful rays block **approx 99%**
- Noise reduction factor **32 decibels**
- WERS rating **5 stars**
- Double layer of Low-E<sup>3</sup> coating.
- 10 year warranty on insulated glass seal.
- Reduced cleaning frequency.

#### Australian Standard AS1288

Laminated glass (standard) must be used for skylights installed 3m or more above floor level.

### NEAT™ Photocatalytic Coating

- Silicone Dioxide/Titanium Dioxide coating reacts with the sun's UV rays to decompose surface organic dirt before rinsing away with the next shower of rain, thereby reducing cleaning frequency.
- The coating also makes the glass surface smoother, so water disperses evenly, sheets off and evaporates quickly; thereby minimising water spotting on the pane.

GGL/GPL window pane tint (i.e. colouration) is slightly different to skylight window pane tint.

## Measure & Quote

VELUX has recommended installers throughout the country that are trained to install VELUX skylights. Scan the QR code below and complete the online webform when you're ready to take the next step, and we'll arrange for a recommended installer in your area to provide a Measure & Quote.



Installers recommended by VELUX are independent contractors who have been trained in the installation of VELUX products but are not employed by VELUX Australia. VELUX cannot be held responsible for work carried out on your property by installers who are independent of VELUX Australia.

## Pitched Roof Skylights


**VSS** Solar-powered



Page 5



**VS** Manually operated



Page 7



**FS** Fixed (non-opening)



Page 9



## Flat Roof Skylights


**VCS** Solar-powered



Page 5



**VCM** Manually operated

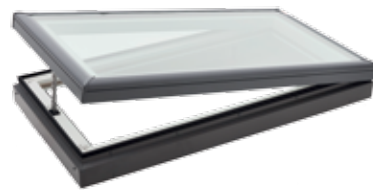

Page 7



**FCM** Fixed (non-opening)



Page 9



## Sun Tunnels and Roof Windows

**TWR** Rigid



Page 11



**TWF** Flexible




Page 11



Page 10

**GGL**  
Roof Window

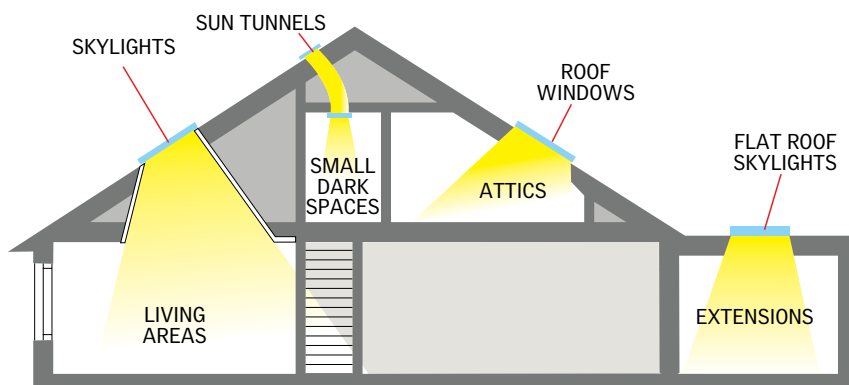

Page 10

**GPL**  
Roof Window





# Automatic sensor-based ventilation\*

## Solar-Powered Skylights

- Solar panel mounted below the skylight provides all the power needed to operate the skylight.
- Rain sensor automatically closes skylight when rain is detected.
- Battery power negates power surges and blackouts.
- Easy to install, no need for electrical wiring.

**\*Requires VELUX ACTIVE**  
- sold separately (Page 5)



## Pitched Roofs



15°-90°  
INSTALLATION PITCH\*

# VSS

## Solar-powered skylight

The VSS is the ultimate skylight that provides abundant daylight and controllable ventilation. Operated by a Radio Frequency wall-mounted keypad (included) and is powered by a concealed battery pack that is recharged by the external solar panel – allowing operation even when the sun isn't out.

- Electrician not required to install.
- White painted interior timber frame and sash.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 10 sizes.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.



Technical Performance	
U-value†	
Skylight	2.50
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.21
Glass only	0.28
Heat block	
Approx	80%
Bushfire^	
BAL40	
Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285	AS1288
AS3959^	AS1530.8.1††
AS4055	



3 YEAR WARRANTY ON ELECTRICS



## Flat Roofs



0°-60°  
INSTALLATION PITCH\*\*

# VCS

## Solar-powered skylight

The VCS is the ultimate skylight that provides abundant daylight and controllable ventilation. Operated by a Radio Frequency wall-mounted keypad (included) and is powered by a concealed battery pack that is recharged by the external solar panel – allowing operation even when the sun isn't out.

- Electrician not required to install.
- Maintenance Free – White PVC interior frame for a tough, hard wearing interior finish.
- Available in 8 sizes.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).




Technical Performance	
U-value†	
Skylight	2.9‡
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.24
Glass only	0.28
Heat block	
Approx	75%
Bushfire^	
BAL40	
Hailstone Test±	
VELUX Simulated Tests	ASTM E822-2009
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285#	AS1288
AS3959^	AS1530.8.1††
AS4055	



3 YEAR WARRANTY ON ELECTRICS

‡See installation preparation guide on page 9.



Also available

# VSE

## Electrically operated



15°-90°  
INSTALLATION PITCH

### VELUX ACTIVE indoor climate control (sold separately)

- **Sensor-based ventilation:** Smart sensors continuously monitor temperature, humidity and CO<sub>2</sub> levels and open or close your skylights accordingly.
- **Stay in control:** Use the app to operate your skylights and blinds using your smartphone.
- **VELUX Active** operates on 2.4GHz and is compatible with modern 'smart' modems. (select the 2.4GHz channel in dual mode on your modem).



- Choice of 9 sizes.
- 2 metre lead (supplied) plugs into power point.
- White painted interior timber frame and sash.
- Insect screen, rain sensor and wall-mounted keypad included.

Visit [www.velux.com.au](http://www.velux.com.au) for more details.

## Solar Blinds

Honeycomb Blackout – FSCH (for VSS/VSE), FSCC (for VCS)

Pleated Translucent – FSLH (for VSS/VSE)

- All blinds are available in white.
- Sold separately.
- Unique installation system allows easy installation.

\* For roofs below 15° pitch, VSS/VSE skylights need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

\*\* VELUX recommends VCS is installed with a slight pitch (e.g. 3°-5°) to help reduce condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; VSS/VSE: 1140mm x 1180mm, VCS: 1275mm x 1275mm).


‡ Cyclone test not performed with screws provided, installation requires #8 roofing screws.

± Hailstone test not performed on solar panel. Solar panel not attached during test.

^ Skylight only. Custom-made flashing required. Skylight tested in closed position (VCS BAL assessed – based on VSS results), metal flywire mesh protection required for opening apertures (consult local council). Roof pitch; VSS: 18°-75°, VCS: 0°-60°. †† Assessed in closed position.



# Healthy daylight, fresh air and sky views

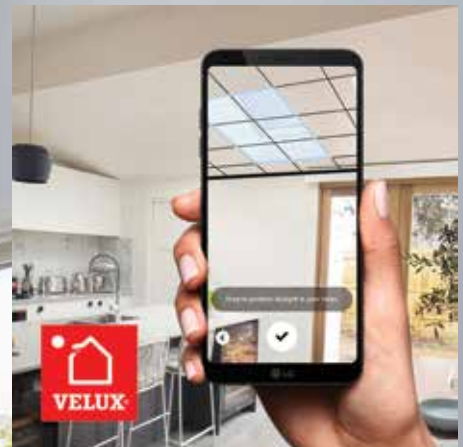


## Imagine the Possibilities

With the new VELUX Visualizer app, we've made it easier than ever to reimagine any room in your home. Using your device's built-in camera, this augmented reality app allows you to add, customize, and explore our skylight products in real time.





## Pitched Roofs

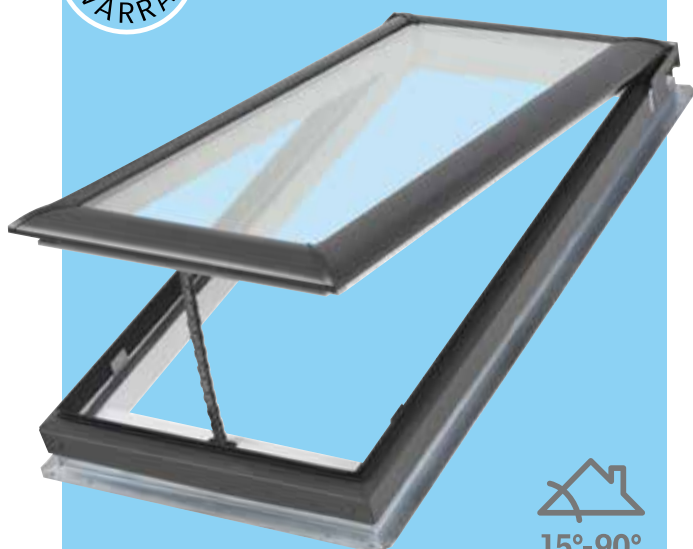

15°-90°  
INSTALLATION PITCH\*



## Flat Roofs



0°-60°  
INSTALLATION PITCH\*\*

# VS

## Manually operated

Suitable for pitched roofs, the VS manually operated skylight provides comfort and energy savings of free daylight and natural ventilation.

- White painted interior timber frame and sash.
- Outer aluminium cappings (grey).
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 10 sizes.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.



### Technical Performance

U-value†	
Skylight	2.50
Glass only	1.93

### Solar Heat Gain Co-efficient†

Skylight	0.21
Glass only	0.28

### Heat block

Approx 80%

### Bushfire^

BAL40

### Hailstone Test±

VELUX Simulated Tests  
ASTM E822-2009

### WERS max 5 stars (summer rating)


★★★★★

### Australian Standards

AS4285 AS1288  
AS3959^ AS1530.8.1††  
AS4055

### Manual control options VS (sold separately)

- ZZZ 201 Winder handle for in-reach operation.
- ZCT 300 Telescopic rod control.  
(Extendable between 145cm-285cm)



- ZOZ 032 Short control rod. 60cm long.

## Solar Blinds for VS

### Honeycomb Blackout – FSCH Pleated Translucent – FSLH

Includes wireless, wall-mounted keypad



- All blinds are available in white. • Sold separately.
- Unique installation system allows easy installation.

# VCM

## Manually operated

Suitable for flat roofs, the VCM manually operated skylight provides comfort and energy savings of free daylight and natural ventilation.

- Maintenance free – White PVC interior frame for a tough interior finish.
- Outer aluminium cappings (grey).
- Available in 7 sizes.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).



### Technical Performance

U-value†	
Skylight	2.9‡
Glass only	1.93

### Solar Heat Gain Co-efficient†

Skylight	0.24
Glass only	0.28

### Heat block

Approx 75%

### Bushfire^

BAL40

### Hailstone Test±

VELUX Simulated Tests  
ASTM E822-2009

### WERS max 5 stars (summer rating)

★★★★★


### Australian Standards

AS4285# AS1288  
AS3959^ AS1530.8.1††  
AS4055

‡See installation preparation guide on page 9.

### Manual control options VCM (sold separately)

- ZZZ 212 Winder handle for in-reach operation.
- ZCT 300 Telescopic rod control.  
(Extendable between 145cm-285cm)



- ZOZ 032 Short control rod. 60cm long.

## Solar Blinds for VCM

### Honeycomb Blackout – FSCH

Includes wireless, wall-mounted keypad.



- All blinds are available in white. • Sold separately.
- Unique installation system allows easy installation.

\* For roofs below 15° pitch, VS needs to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

\*\* VELUX recommends VCM is installed with a slight pitch (e.g. 3°-5°) to help reduce condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; VS: 1140mm x 1180mm, VCM: 1275mm x 1275mm).

‡ VCM Cyclone test not performed with screws provided, installation requires #8 roofing screws. †† Assessed in closed position.

^ Custom-made flashing required. Skylight tested in closed position, metal flywire mesh protection required for opening apertures (consult local council). Roof pitch; VS: 18°-75°, VCM: 0°-60°.

NB: NCC Vol 1 & 2 regulations (Prevention of Falls from Windows – Balustrades & Barriers): contact VELUX for information relating to restrictor devices for within-reach opening skylights.



# Outstanding daylight provision

where extra ventilation is not required

FCM skylights: Versatile double-glazed alternative to acrylic domes.



Old acrylic domes can be easily damaged.

FCM SKYLIGHTS ARE IDEAL REPLACEMENTS\*\* FOR ACRYLIC DOMES

14 sizes available to replace common acrylic dome sizes.

In simulated tests\* VELUX skylights withstood hailstones, up to the size of cricket balls, launched at speeds experienced during heavy storms.

Watch our hail test video.



See Hail Storm case study.  
[www.velux.com.au](http://www.velux.com.au)

\*\* Custom-made collar adaptor (not supplied) required to fit.

\*ASTM E822-2009 standard practice for determining resistance of Solar Collector Covers to Hail impact with propelled ice balls.





## Pitched Roofs



15°-90°  
INSTALLATION PITCH\*

# FS

## Fixed (non opening)


Suitable for pitched roofs, the FS Skylight is the perfect solution for creating light filled rooms where added ventilation is not necessary. Energy efficient glazing and the use of blinds ensure heat transference is minimised.

- White painted interior timber frame.
- Outer aluminium cappings (grey).
- Complete with flashing for corrugated iron or tile roofs.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 11 sizes.

Technical Performance	
U-value†	
Skylight	2.60
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.24
Glass only	0.28
Heat block	
Approx 75%	
Bushfire^	
BAL40	
Hailstone Test±	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.8.1	
AS4055	



## Flat Roofs

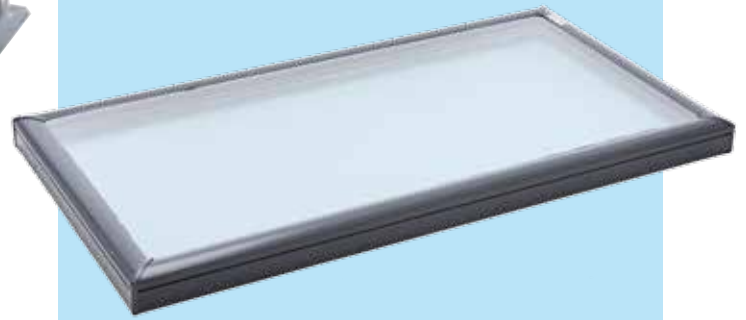

Our biggest skylights ever!  
FCM 3072 & 4672

0°-60°  
INSTALLATION PITCH\*\*

# FCM

## Fixed (non opening)

Suitable for flat roofs, the brilliantly simple FCM Skylight is a cost effective way to provide natural daylight to buildings with flat roofs. The High Performance double glazing provides excellent thermal insulation and has been tested for hail resistance.

- Unlike acrylic or polycarbonate – laminated glass will not fade nor discolour over time.
- The smooth exterior gives a lower profile on the roof.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Approx 99% UV Block.
- Available in 14 sizes.
- Requires custom-made flashing (not supplied by VELUX).
- Versatile positioning††: most sizes can be used in portrait, landscape or even "diamond shape" orientation.

Technical Performance	
U-value†	
Skylight	2.9‡
Glass only	1.93
Solar Heat Gain Co-efficient†	
Skylight	0.28
Glass only	0.28
Heat block	
Approx 70%	
Bushfire^	
BAL40	
Hailstone Test±	
VELUX Simulated Tests ASTM E822-2009	
WERS max 5 stars (summer rating)	
★★★★★	
Australian Standards	
AS4285 AS1288	
AS3959^ AS1530.8.1	
AS4055	



## Solar Blinds for FS

### Honeycomb Blackout – FSCD


### Pleated Translucent – FSLD

Includes wireless, wall-mounted keypad



- All blinds are available in white.
- Sold separately.
- Unique installation system allows easy installation.

## Preparation guide for custom-made flashing

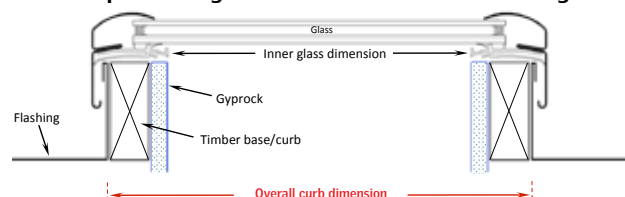

Note: If timber hob is greater than 38mm the Gyprock will encroach on the glazing area.

‡Skylight must be installed with timber hob and Gyprock, as shown (typical installation), to achieve 2.9 U-value rating.

\* For roofs below 15° pitch, FS needs to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings. (NB: build-up not recommended in Bushfire areas.)

\*\* VELUX recommends FCM is installed with a slight pitch (e.g. 3°-5°) to help reduce condensation build-up and water ponding on the glass.

† U-value (W/m²K) and SHGC data based on AFRC simulations, (complete skylight size; FS: 1140mm x 1180mm, FCM: 1275mm x 1275mm).

^ Skylight only. Custom-made flashing required. Roof pitch; FS: 18°-75°, FCM: 0°-60°. VELUX FCM 3072/4672 have been tested and assessed as meeting the requirements of BAL40; please consult local BAL regulators for approval prior to purchase. The BAL Evidence of Suitability report is available upon request.

†† FCM 2270/3072/4672 not recommended for "landscape" orientation.

# CodeMark & NT DTCM for FCM 3072/4672 is not available at time of print (CodeMark currently under evaluation).



## For Attic Conversions



for within-reach only



15°-90°  
INSTALLATION PITCH\*

# GGL

## Centre-Pivot roof window



Beautifully engineered for a lifetime of use, the GGL is ideal for within-reach attic situations.

- A short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard.

### Technical Performance

#### U-value†

Roof Window	1.30
Glass only	1.00

#### Solar Heat Gain Co-efficient†

Skylight	0.31
Glass only	0.30

#### Heat block

Approx 70%

#### UV Harmful Rays Block

Approx 95%

#### WERS max 5 stars (summer rating)

★★★★★

#### Australian Standards

AS4285	AS1288
AS4055	



## For Attic Conversions



for within-reach only



15°-55°  
INSTALLATION PITCH\*

# GPL

## Dual action roof window



Developed for use in attics with shallower pitched roofs to maximise roof top views. For within-reach situations only.

- Opens in two ways: the bottom handle allows for top-hung opening; a short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard.
- Insect screen available as extra.

### Technical Performance

#### U-value†

Roof Window	1.30
Glass only	1.00

#### Solar Heat Gain Co-efficient†

Skylight	0.31
Glass only	0.30

#### Heat block

Approx 70%

#### UV Harmful Rays Block

Approx 95%

#### WERS max 5 stars (summer rating)

★★★★★

#### Australian Standards

AS4285†	AS1288
AS4055	

## Blinds for GGL/GPL

### Manual Honeycomb Blackout – FHC

- All blinds available in white • Unique installation system allows easy installation • Sold separately

## Opening Restrictors

NCC Vol 1 & 2 regulations (Prevention of Falls from Windows – Balustrades & Barriers): contact VELUX for information relating to restrictor devices for within-reach opening roof windows.

\* For roofs below 15° pitch, roof windows need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

† U-value (W/m²K) and SHGC calculated according to EN 14351-1:2006 + A2:2016 (window size 1140mm x 1400mm).

‡ Except Cyclonic.

# Sun Tunnels



## Time-saving design

The VELUX Sun Tunnel has been designed to make installation quick and easy. Tube assembly is simple so little time is spent in the roof cavity.

The VELUX rigid (TWR) and flexible (TWF) Sun Tunnels provide installation flexibility. Rigid tunnels are most suited to roof spaces with minimal obstructions. They have a highly reflective shaft to achieve maximum light output. Flexible tunnels can be used when obstructions in the roof cavity prevent the use of rigid Sun Tunnels.

VELUX Sun Tunnels for pitched roofs are designed to provide natural light into corridors, stairwells, powder rooms and cupboards; where installation of a VELUX Skylight is not possible.



(TWR pictured)




### CORRIDORS PANTRIES AND POWDER ROOMS

### DAYLIGHT WHERE YOU WANT

AFTER

BEFORE



#### Product features:

- Choice of highly reflective rigid or flexible tunnel (350mm diameter, lengths vary – details on page 15).
- 4mm toughened external glass.
- Dual-layered ceiling diffuser – spreads light over an area of up to 9m².
- Interior diffuser with 'Edge Glow', a clear ring on the diffuser's edge.
- Outer polyurethane cappings with integrated flashings for tiled/corrugated iron roofs.
- 'Stay clean' coating on glass exterior reduces cleaning frequency.
- Easier and quicker to install with VELUX Flexi Loc system. (TWR).



NB: For best performance VELUX recommends TWR for shafts over 1m.

\* Sun Tunnels are not suitable for roof pitches below 15°.

^ Bushfire testing applicable to roof pitches 18°-60°. TWR only.





## VELUX Blinds – effective light control



VELUX has a choice of blinds that provide different levels of light control. Tailor-made to fit perfectly to each size of skylight or roof window, they are easy to install and are supplied with white powder-coated side channels that allow the blind to be positioned at any point down the window.

### Honeycomb Blackout



A stylish and modern blind providing protection from heat and glare while providing a near complete blackout from light.

- Honeycomb structured material.
- Near-total light reduction.
- Reduce heat by approx 70%\*.
- Available in white only.
- White rails and body.

### Pleated Translucent



Softening glare with semi translucent material, the pleated blind provides a gentler natural light, perfect for the Kitchen, Dining, or Bathroom.

- Reduces Glare.
- Blind can be stopped at any position.
- Reduce heat by approx 27%\*.
- Available in white only.
- White rails and body.

### Easy to Install



Unique installation system makes installing our blinds a snap!

Installation is simple if window is within easy reach.

## Blind options

Blind to fit	Manual Honeycomb Blackout	Solar Honeycomb Blackout**	Solar Pleated Translucent**
FS		✓	✓
VS		✓	✓
VSS/E		✓	✓
VCS		✓	
VCM		✓	
GGL	✓		
GPL	✓		

### Blinds for existing installed VELUX Skylights

Blinds can be retrofitted to skylight after installation (FCM skylights require additional Accessory tray to be used to fit blinds).

Please note: New VELUX blinds do not fit older VELUX products.

Contact VELUX to check availability of suitable blinds.

Contact VELUX for information on blinds for FCM.

\* Based on VELUX internal testing with 3076 model roof window.

\*\*Solar blinds include wireless wall-mounted keypad (KLI 312).

NB: VELUX recommends retracting blinds during windy conditions if skylight is open.



# Precision-made Flashings

## Safe, effective rainwater drainage

The unique construction of VELUX flashings ensures safe drainage of rainwater coming from the roof above the window. Because the roofing material covers both top and sides, VELUX flashings are largely unobtrusive. To harmonise even further with the roofing material, they are available in standard grey aluminium.



### EDW flashing – for metal or tile roofing, e.g. corrugate, tile

- Flashing for single skylight or roof window.
- Designed for roof pitches from 15° to 90°.  
For roofs below 15° create pitch-up and use custom made flashing (not supplied by VELUX).

## VELUX Combination Flashing

for metal or tile roofing, e.g. corrugate, tile

Side by Side



Above – Below



Multi (4+)




VELUX skylights can be coupled together using 'combi' flashing in a variety of configurations to add truly inspiring features to any room of the house.

When installing skylights with 'combi' flashing, skylights must be installed with a strict 100mm space between each skylight. See back page for information on 'combi' flashing product codes.

Contact VELUX when installing VSS above/below combination due to positioning of solar-panel.

NB: New VELUX flashings do not fit older VELUX products. Contact VELUX for information and pricing. RRP does not include combination flashing, contact VELUX for information regarding price of combination flashing.

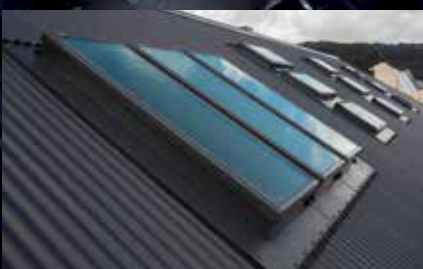

### Custom flashing – All other situations


- Required for flat roof skylight installations.
- Useful for situations where VELUX flashing isn't suitable. Such as bushfire areas, or when installing in a roof outside the installation pitch range (pitch adaptor), or when colour matching to roof is preferable.
- Not supplied by VELUX, contact VELUX for more information on custom flashing.

## Opening Skylights (pitched roofs)



15°-90°

Overall frame dimension w x h mm ▶

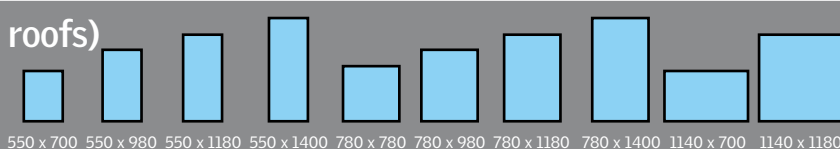Manual *Page 7*

Size code ▶

C01 C04 C06 C08 M02 M04 M06 M08 S01 S06

**VS** High Performance double glazing (RRP) \$ 1,093 1,114 1,183 1,245 1,254 1,304 1,415 1,526 1,373 1,701

Package includes: Flashing for single skylight<sup>†</sup> in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek), insect screen and operating hook.  
NB: Operating Rod (ZCT 300, ZOZ 032) for out-of-reach operation and winder handle (ZZZ 201 for within-reach operation) to be purchased separately.

Solar/Electric *Page 5*

Size code ▶

C01 C04 C06 C08 M02 M04 M06 M08 S01 S06

**VSS** (Solar) High Performance double glazing (RRP) \$ 2,574 2,607 2,675 2,744 2,744 2,805 2,924 3,045 2,904 3,230

**VSE** (Electric) High Performance double glazing (RRP) \$ 2,395 2,426 2,489 2,553 – 2,611 2,722 2,833 2,704 3,006

Package includes: Flashing for single skylight<sup>†</sup> in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek), insect screen, pre installed motor, wall-mounted keypad and rain sensor, solar panel included with VSS.

Blinds<sup>††</sup> (VS, VSS & VSE)

Size code ▶

C01 C04 C06 C08 M02 M04 M06 M08 S01 S06

**FSCH** Solar Honeycomb Blackout<sup>^</sup> (RRP) \$

593 593 593 593 607 607 607 607 619 619

**FSLH** Solar Pleated Translucent<sup>^</sup> (RRP) \$


593 593 593 593 607 607 607 607 619 619

## Fixed Skylights (pitched roofs)



15°-90°

Overall frame dimension w x h mm ▶

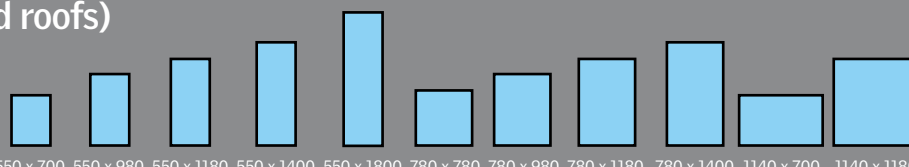Fixed *Page 9*

Size code ▶

C01 C04 C06 C08 C12 M02 M04 M06 M08 S01 S06

**FS** High Performance double glazing (RRP) \$ 623 706 796 883 1,228 831 870 971 1,073 952 1,116

Package includes: Flashing for single skylight<sup>†</sup> in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek).

Blinds<sup>††</sup> (FS)

Size code ▶

C01 C04 C06 C08 C12 M02 M04 M06 M08 S01 S06

**FSCD** Solar Honeycomb Blackout<sup>^</sup> (RRP) \$ 593 593 593 593 743 607 607 607 607 619 619

**FSLD** Solar Pleated Translucent<sup>^</sup> (RRP) \$ 593 593 593 593 – 607 607 607 607 619 619


## Opening Roof Windows

Recommended for within-reach situations only



15°-90° (GPL 15°-55°)

Overall frame dimension w x h mm ▶

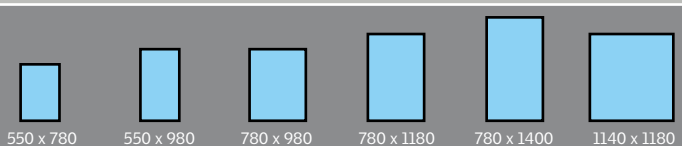Manual *Page 10*

Size code ▶

CK02 CK04 MK04 MK06 MK08 SK06

**GGL** Centre-pivot, Laminated double glazing (RRP) \$ 886 944 1,103 – 1,326 1,616

**GPL** Dual action, Laminated double glazing (RRP) \$ – 1,046 1,199 1,314 1,467 1,694

Package includes: Flashing for single window<sup>†</sup> in corrugated iron or tile roof (not suitable for metal profiles such as Klip-Lok, Trimdek).

**ZIL** Insect Screens (only suitable for GPL) (RRP) \$ 327 327 405 405 405 451

ZIL Insect Screen is fitted to ceiling to cover plaster reveal. Suitable for within-reach applications only. NB: side channel length to be cut to size.

Blinds<sup>††</sup> (GGL, GPL)

Size code ▶

CK02 CK04 MK04 MK06 MK08 SK06

**FHC** Manual Honeycomb Blackout (RRP) \$ 237 255 263 281 306 329

†† NEW VELUX blinds and flashings do not fit older VELUX products. Contact VELUX to check availability of suitable blinds and flashings.

\* For roofs below 15° pitch, skylights and roof windows need to be raised to 15° and custom flashed. VELUX can assist with technical advice and drawings.

<sup>^</sup>Wireless wall-mounted keypad supplied.

† For multiple skylights/roof windows installed side by side, contact VELUX for information and pricing on combination flashing.

Delivery time (in working days)#

NSW 1-2

VIC 1-2

SA 3

ACT 1-2

QLD 2-5

NT 3-7

TAS 3-5

WA 1-2<sup>§</sup>

# Metropolitan areas only. Subject to order being received by VELUX before 12 EST noon. Add extra working day to delivery time for orders received by VELUX after 12 EST noon.  
§ Subject to availability at Perth warehouse.

Price list effective 1st April 2024. All prices are supply only and include GST. Prices subject to change without notice. All prices quoted are Recommended Retail Prices (RRP) only.



## Opening Skylights (flat roofs)



0°-60°

Overall curb dimension w x h mm ▶

665 x 665

665 x 970

665 x 1275

870 x 870

870 x 1275

970 x 970

1275 x 665

1275 x 1275

### Manual Page 7

Size code ▶

2222

2234

2246

3030

3046

3434

4622

4646

VCM High Performance double glazing

(RRP) \$

1,080

1,167

1,289

1,351

1,467

1,411

-

1,720

Package includes: Insect screen and operating hook. Custom flashings are required for VCM (not provided) – VELUX can assist with technical advice and drawings.

NB: Operating Rod (ZCT 300, ZOZ 032) for out-of-reach operation and winder handle (ZZZ 212 for within-reach operation) to be purchased separately.

### Solar Page 5

Size code ▶

2222

2234

2246

3030

3046

3434

4622

4646

VCS High Performance double glazing

(RRP) \$

2,485

2,628

2,800

2,809

2,947

2,870

2,818

3,088

Package includes: Insect screen, pre installed motor, wall-mounted keypad, rain sensor and solar panel.

Custom flashings are required for VCS (not provided) – VELUX can assist with technical advice and drawings.

### Blinds (VCM/VCS)

Size code ▶

2222

2234

2246

3030

3046

3434

4622

4646

FSCC Solar Honeycomb Blackout  
Wireless wall-mounted keypad supplied

(RRP) \$

594

594

594

607

607

619

656

656

## Fixed Skylights (flat roofs)



0°-60°

Page 9

Inner glass

dimension w x h mm ▶

368 x 775

572 x 572

572 x 775

572 x 876

572 x 1181

572 x 1792

775 x 775

775 x 1181

775 x 1410

876 x 876

876 x 1181

1181 x 1181

775 x 1842

1181 x 1842

Overall curb

dimension w x h mm ▶

460 x 870

665 x 665

665 x 870

665 x 970

665 x 1275

665 x 1885

870 x 870

870 x 1275

870 x 1505

970 x 970

970 x 1275

1275 x 1275

870 x 1935

1275 x 1935

### Fixed

Size code ▶

1430

2222

2230

2234

2246

2270

3030

3046

3055

3434

3446

4646

3072

4672

FCM

(RRP) \$

331

360

390

414

469

846

454

577

703

516

608

639

1,782

1,984

NB: FCM can be positioned in portrait or landscape (FCM 2270/3072/4672 not recommended for landscape orientation).

Custom flashings are required for FCM (not provided) – VELUX can assist with technical advice and drawings. Contact VELUX for information on blinds for FCM.

## Sun Tunnels Page 11



15°-60°

Tunnel  
diameter  
350mm

460 x 460

TWF 0K14 Sun Tunnel with **flexible** shaft – 2200mm long, 350mm diameter

(RRP) \$ 445

TWR 0K14 Sun Tunnel with **rigid** shaft – 1650mm long, 350mm diameter

(RRP) \$ 721

ZTR 0K14 **Rigid** extension – 1240mm (NOT suitable for TWF)

(RRP) \$ 287

Package complete with integrated flashing for tiled or corrugated iron roofs (not suitable for metal profiles such as Klip-Lok, Trimdek), tunnel and ceiling diffuser.

Sun Tunnels are not suitable for roof pitches below 15°.

## Electric and Rod Controls

ZZZ 201 Winder handle (white) to operate VS openable skylights within reach

(RRP) \$ 55

ZZZ 212 Winder handle (white) to operate VCM openable skylights within reach

(RRP) \$ 55

ZOZ 032 Short rod control (60cm) to operate within reach, manual openable skylights

(RRP) \$ 68

ZCT 300 Extendable rod control to operate manual openable skylights. 145cm – 285cm length

(RRP) \$ 93

KLI 310 Wall Mounted keypad for use with electric/solar Skylights and Blinds

(RRP) \$ 170

KIX 300 VELUX ACTIVE starter kit – includes 1 x internet gateway, 1 x climate sensor, 1 x departure switch

(RRP) \$ 685

KLA 300 VELUX ACTIVE indoor climate sensor

Additional climate sensors recommended if multiple rooms contain opening skylights

(RRP) \$ 306

KLF 200 Interface Unit. Connect to building managements systems, sensors and switches  
Individual control of 5 products (or groups), up to 200 products in total

(RRP) \$ 716

Delivery time (in working days)#

NSW 1-2

VIC 1-2

SA 3

ACT 1-2

QLD 2-5

NT 3-7

TAS 3-5

WA 1-2<sup>§</sup>


# Metropolitan areas only. Subject to order being received by VELUX before 12 EST noon. Add extra working day to delivery time for orders received by VELUX after 12 EST noon.  
§ Subject to availability at Perth warehouse.

Price list effective 1st April 2024. All prices are supply only and include GST. Prices subject to change without notice. All prices quoted are Recommended Retail Prices (RRP) only.


# EKW Combination Flashing

Use when combining multiple pitched roof skylights\* together


## Side by Side

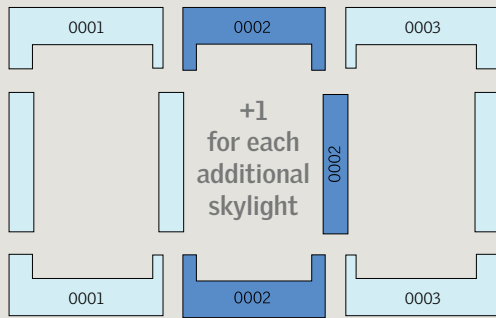

## Multi (4+)

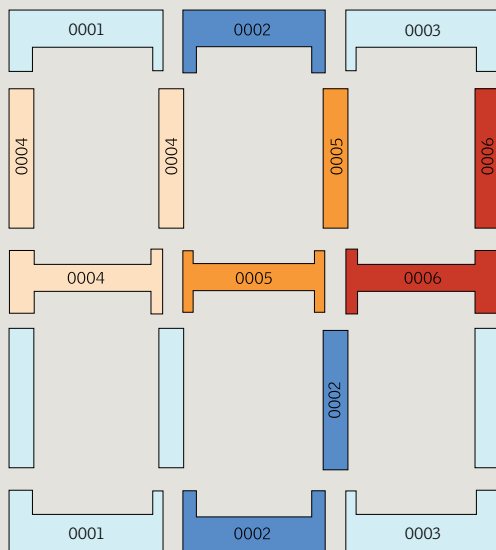

## Above – Below

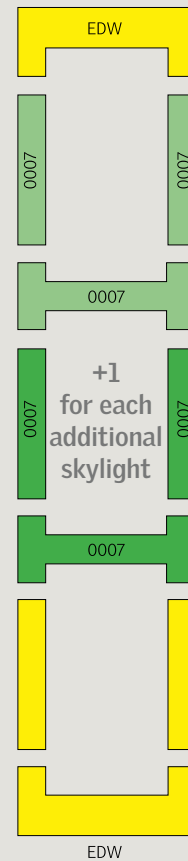

Select your skylight configuration and note the flashing components required.

Combi Product Code: EKW SIZE 000X

Example: 3 skylights side-by-side require 0001, 0002, 0003 components.

Codes become EKW M04 0001, EKW M04 0002, EKW M04 0003

\* Not suitable for flat roof skylights.

VELUX Australia Pty Ltd  
78 Henderson Road, Alexandria NSW 2015

Customer Services: Tel: 1300 859 856  
E-mail: [customer.service@velux.com.au](mailto:customer.service@velux.com.au)


 @veluxaustralia

[www.velux.com.au](http://www.velux.com.au)

**VELUX®**

## SYDNEY HEAD OFFICE

Office may not be open to the public.  
Please call before visiting.

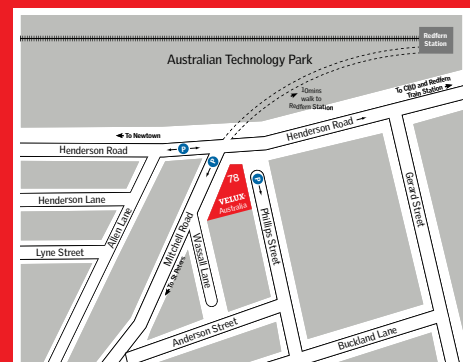

OPENING TIMES:  
Sydney Head Office: 8am-5pm (Mon-Fri)